

CF 25 C-Fix for impact mounting 9125



Areas of application:

For mounting pipes to the inner side of plasterboard walls.

Installation Guide:

- Put the flexible pipe into the CF
- Hammer in the CF at the desired location

Product details:

Content pack/box 50 / 1.600

Pipe Ø 25

Torque values 9 kg



Product benefits/properties:

The C-Fix clip enables conduits to be mounted to plasterboard walls quickly and easily without drilling. The unique design ensures a strong grip and does not damage the outside of the wall.

Technical data:


Material Chromed steel, rustproof raw material fulfilling EU guideline 2002/95/EG RoHS

Weight per piece 6,40 g

Max. reccd. load Reference value: CF20: 90 N (9.0 kg) Plasterboard 15 mm, 110 N (11 kg) Plasterboard 25 mm

Breaking load Reference value: CF20: 128.00 N (12.8 kg) Plasterboard 15 mm, 168.00 N (16.8 kg) Plasterboard 25 mm

GTIN (EAN)

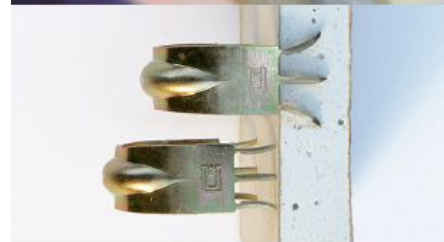

The C-Fix clip enables conduit to be mounted to plasterboard walls quickly and easily. The unique design ensures a strong grip and does not damage the outside of the wall. The flexible installation pipe is inserted into the CF, the CF is hit with a hammer – done!

Schnabl Stecktechnik GmbH
Bahnhofplatz 1, Postfach 63, 3100 St. Pölten, Austria
Telefon +43(0)2742/22167-0, Telefax +43(0)2742/22167-50
office@schnabl.works, www.schnabl.works

 **Schnabl**[®]
time saving products

Stand: 2/2020