

Use medium to high r.p.m. when drilling. LB 6 9097

CE

Areas of application:

9095_LB.jpg

Product details:

Colour: 6

Content pack/box 1 / -

The drilling requires Drill-Ø mm

Mounting and usage instructions:

Glass cutting drill bits with steel shank and carbide brazed cutting edge. Product contains no relevant substances in terms of REACH regulation EC (No 1907/2006).


Technical data:

Material Lance drill

Weight per piece 26,00 g

Max. recd. load For the exact hole in hollow bricks, tiles and earthenware. (When drilling in solid bricks and concrete the drill dust is not carried away, so the LB is therefore not adequate.)

GTIN (EAN)

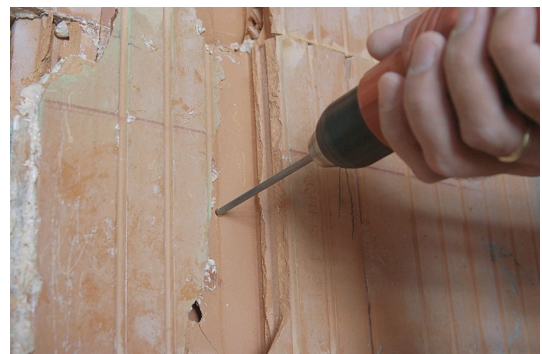

The LB lance drill is also ideal for tiling and ceramics.

Schnabl Stecktechnik GmbH
Bahnhofplatz 1, Postfach 63, 3100 St. Pölten, Austria
Telefon +43(0)2742/22167-0, Telefax +43(0)2742/22167-50
office@schnabl.works, www.schnabl.works

Stand: 2/2020

 **Schnabl**[®]
time saving products