

UPD flush socket cover 12100



Areas of application:

The UPD is suitable for a variety of flush sockets

Installation Guide:

The UPD flush socket cover is set on the socket before plastering. The markers ensure an easy retrieval of the socket after plastering. Set the core drill right in the middle of the markers and drill into the cone of the UPD flush socket cover. Insert the spring hook and pull out the UPD.

Product details:

Colour:	black
Content pack/box	100 / -

Product benefits/properties:


The UPD flush socket cover enables, by its markers, a fast and secure retrieval of flush sockets as well as time and cost saving removal by using the core drill and spring hook. Thus, time consuming amendments on broken plastering can be avoided.

Technical data:

Material	LDPE Temperature range: -30 to 60 ° C silicon-free halogen-free
----------	--

Weight per piece 7,80 g

GTIN (EAN)

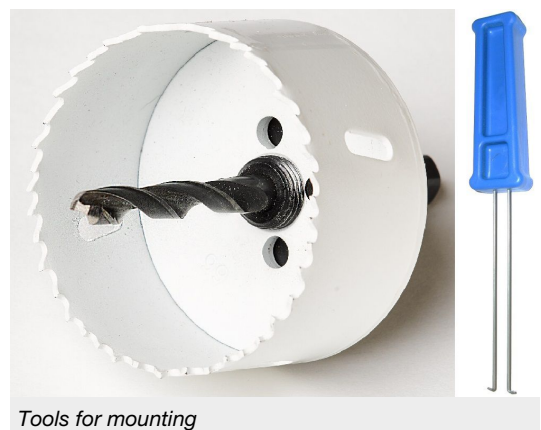

Schnabl Stecktechnik GmbH
Bahnhofplatz 1, Postfach 63, 3100 St. Pölten, Austria
Telefon +43(0)2742/22167-0, Telefax +43(0)2742/22167-50
office@schnabl.works, www.schnabl.works

 **Schnabl**[®]
time saving products

Stand: 2/2020