

USE 16-20/55 Buried clamp single

12110



Areas of application:

For the simple plaster laying of flexible tubes and pipes (on hollow brick, Ytong, Durisol brick, concrete).

Installation Guide:

- Drill a 6 mm Ø hole
- Insert the flexible pipe
- Stretch the flexible pipe
- Insert the USD into the drill-hole

Product details:

Colour:	light grey
Content pack/box	100 / 3.200
Clamping range Pipe	16-20
Dowel length in mm	55


Mounting and usage instructions:


Use the LB lance drill - indispensable for the perfect flush mounting - drill an exact hole in the hollow brick. The USE is clipped to the pipe then inserted into the drill hole. The clamp is available in three dimensions and is suitable for holding two clamping ranges.

Product benefits/properties:

USE is a buried clamp for flexible pipes and tubes for single laying. The integrated nib on the inside of the clamp allows the pipe to be spanned between two clamps for easier wiring.

Technical data:

Material	PP Temperature range: -10 °C up to +85 °C silicon-free halogen-free
Weight per piece	1,90 g
Max. recd. load	Reference value: USE 20-25/55: 160 N (16 kg) hollow brick, 150 N (15 kg) aerated concrete
Breaking load	Reference value: USE 20-25/55: 223.40 N (22 kg) hollow brick, 233.10 N (23 kg) aerated concrete
GTIN (EAN)	 9 008439 121106

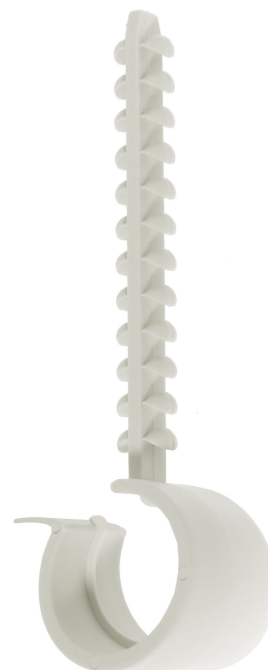

Simply brilliant: the integrated nib on the interior side of the clip enables the pipe to tense between the two clips for easier cable insertion.

Schnabl Stecktechnik GmbH
Bahnhofplatz 1, Postfach 63, 3100 St. Pölten, Austria
Telefon +43(0)2742/22167-0, Telefax +43(0)2742/22167-50
office@schnabl.works, www.schnabl.works

 **Schnabl**[®]
time saving products

Stand: 2/2020